

# 50

## BGE series

### 50X50X15mm

#### ●General Specification / 一般規格


- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)
- Impeller : plastic(94V-0)
- Bearing / Ball bearing;FMB
- Weight / 30g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)
- 葉：塑膠(94V-0)
- 軸承 / 滾珠軸承;FMB
- 重量 / 30克



#### ●Specification / 詳細規格 \* 軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油軸承/sleeve bearing

| Model        | Bearing   | Voltage | Operating Voltage | Current | Speed | Max. Air Flow | Max. Static Pressure | Sound               | Weight              |       |    |
|--------------|-----------|---------|-------------------|---------|-------|---------------|----------------------|---------------------|---------------------|-------|----|
| 機型           | 軸承        | 電壓      | 操作電壓              | 電流      | 回転数   | 最大風量          | 最大静圧                 | 騒音値                 | 重量                  |       |    |
| Part No.     | B / S / F | V       | V                 | A       | RPM   | m³/min        | CFM                  | mm-H <sub>2</sub> O | in-H <sub>2</sub> O | dBA   | g  |
| BGE05115_05M | B/S       | 5       | 4.5~5.5           | 0.12    | 4500  | 0.10          | 3.37                 | 7.56                | 0.30                | 32.54 | 30 |
| BGE05115_05H | B/S       | 5       | 4.5~5.5           | 0.18    | 5500  | 0.12          | 4.22                 | 11.77               | 0.46                | 37.03 | 30 |
| BGE05115_05U | B/S       | 5       | 4.5~5.5           | 0.18    | 6500  | 0.15          | 5.15                 | 17.46               | 0.69                | 41.75 | 30 |
| BGE05115_12M | B/S       | 12      | 7.0~13.2          | 0.07    | 4500  | 0.10          | 3.37                 | 7.56                | 0.30                | 32.54 | 30 |
| BGE05115_12H | B/S       | 12      | 7.0~13.2          | 0.09    | 5500  | 0.12          | 4.22                 | 11.77               | 0.46                | 37.03 | 30 |
| BGE05115_12U | B/S       | 12      | 7.0~13.2          | 0.15    | 6500  | 0.15          | 5.15                 | 17.46               | 0.69                | 41.75 | 30 |
| BGE05115_12V | B/S       | 12      | 7.0~13.2          | 0.15    | 7500  | 0.17          | 5.85                 | 23.87               | 0.94                | 46.55 | 30 |
| BGE05115_24M | B/S       | 24      | 14.0~26.4         | 0.05    | 4500  | 0.10          | 3.37                 | 7.56                | 0.30                | 32.54 | 30 |
| BGE05115_24H | B/S       | 24      | 14.0~26.4         | 0.07    | 5500  | 0.12          | 4.22                 | 11.77               | 0.46                | 37.03 | 30 |
| BGE05115_24U | B/S       | 24      | 14.0~26.4         | 0.12    | 6500  | 0.15          | 5.15                 | 17.46               | 0.69                | 41.75 | 30 |

#### ● Drawing/ 圖面及出入風口

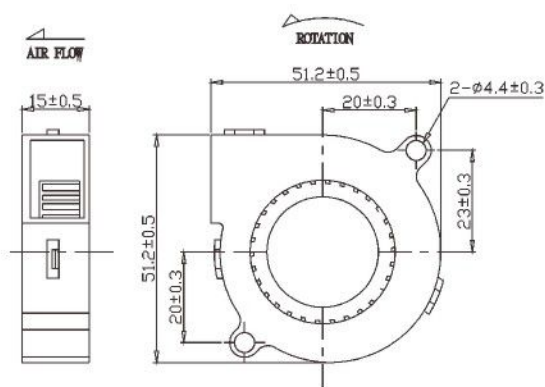

#### ● Characteristic Curves/ 特性曲線

