

92

AGE series

92X92X25mm

●General Specification / 一般規格


- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)
Impeller : plastic(94V-0)
- Bearing / Ball bearing;FMB;sleeve bearing
- Weight / 85g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)
葉：塑膠(94V-0)
- 軸承 / 滾珠軸承;FMB;含油軸承
- 重量 / 85克




●Specification / 詳細規格 * 軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油軸承/sleeve bearing

Model	Bearing	Voltage	Operating Vol.	Current	Speed	Max. Air Flow		Max. Static Pressure		Sound	Weight
機型	軸承	電壓	操作電壓	電流	轉速	最大風量		最大風壓		噪音	重量
P/N	B / S / F	V	V	A	RPM	m³/min	CFM	mm-H ₂ O	In-H ₂ O	dBA	g
AGE09225*12J	B / F / S	12	6.0~13.2	0.08	2100	1.02	36.04	2.04	0.08	24.68	85
AGE09225*12L	B / F / S	12	6.0~13.2	0.11	2450	1.17	41.16	2.62	0.10	28.20	85
AGE09225*12M	B / F / S	12	6.0~13.2	0.14	2850	1.38	48.71	3.51	0.14	32.38	85
AGE09225*12H	B / F / S	12	6.0~13.2	0.18	3200	1.56	55.07	4.24	0.17	35.34	85
AGE09225*12U	B / F / S	12	6.0~13.2	0.35	3800	1.86	65.71	5.91	0.23	40.39	85
AGE09225*12V	B / F / S	12	6.0~13.2	0.41	4200	2.01	71.03	6.85	0.27	43.25	85
AGE09225*24J	B / F / S	24	12.0~26.4	0.03	2100	1.02	36.04	2.04	0.08	24.68	85
AGE09225*24L	B / F / S	24	12.0~26.4	0.08	2450	1.17	41.16	2.62	0.10	28.20	85
AGE09225*24M	B / F / S	24	12.0~26.4	0.06	2850	1.38	48.71	3.51	0.14	32.38	85
AGE09225*24H	B / F / S	24	12.0~26.4	0.09	3200	1.56	55.07	4.24	0.17	35.34	85
AGE09225*24U	B / F / S	24	12.0~26.4	0.13	3800	1.86	65.71	5.91	0.23	40.39	85
AGE09225*24V	B / F / S	24	12.0~26.4	0.18	4200	2.01	71.03	6.85	0.27	43.25	85
AGE09225*48J	B / F / S	48	24.0~52.8	0.03	2100	1.02	36.04	2.04	0.08	24.68	85
AGE09225*48L	B / F / S	48	24.0~52.8	0.04	2450	1.17	41.16	2.62	0.10	28.20	85
AGE09225*48M	B / F / S	48	24.0~52.8	0.06	2850	1.38	48.71	3.51	0.14	32.38	85
AGE09225*48H	B / F / S	48	24.0~52.8	0.09	3200	1.56	55.07	4.24	0.17	35.34	85

● Drawing & panel out-cuts/ 圖面及出入風口

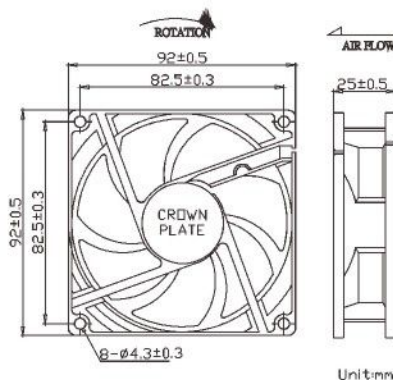

● Characteristic Curves/ 特性曲線

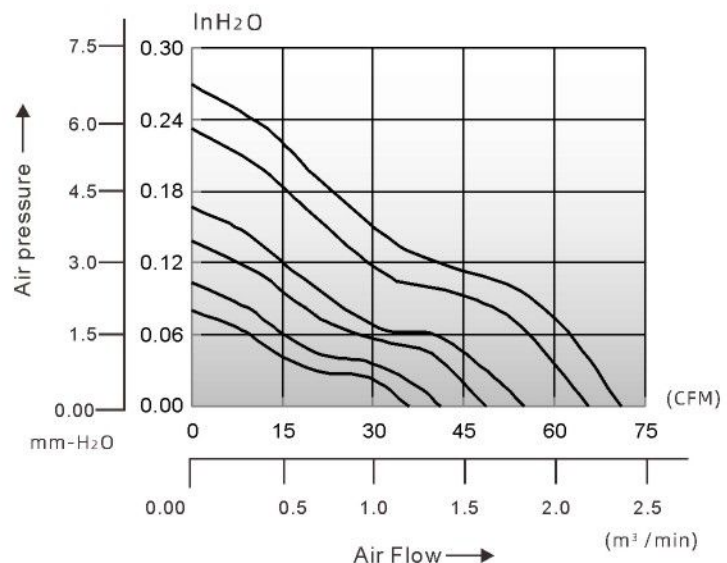

Specification is subject to change for improvement without notice / 基於改良的規格變更，不另行通知