

80

AGD series

80X80X25mm

●General Specification / 一般規格

- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)
Impeller : plastic(94V-0)
- Bearing / Ball bearing;sleeve bearing
- Weight / 82g


- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)
葉：塑膠(94V-0)
- 軸承 / 滾珠軸承;含油軸承
- 重量 / 82克



●Specification / 詳細規格 * 軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油軸承/sleeve bearing

Model	Bearing	Voltage	Operating Vol.	Current	Speed	Max. Air Flow		Max. Static Pressure		Sound	Weight
機型	軸承	電壓	操作電壓	電流	轉速	最大風量		最大風壓		噪音	重量
P/N	B/S/F	V	V	A	RPM	m³/min	CFM	mm-H ₂ O	in-H ₂ O	dBA	g
AGD08025*12J	B	12	6.0~13.2	0.25	3500	1.49	52.64	5.40	0.21	34.83	82
AGD08025*12I	B	12	6.0~13.2	0.41	4000	1.72	60.62	7.18	0.28	38.92	82
AGD08025*12L	B	12	6.0~13.2	0.52	4500	1.93	68.3	8.94	0.35	41.77	82
AGD08025*12M	B	12	6.0~13.2	0.66	5000	2.18	77.09	11.41	0.45	44.11	82
AGD08025*12H	B	12	6.0~13.2	0.65	5500	2.38	83.99	13.32	0.52	46.89	82
AGD08025*24J	B	24	12.0~26.4	0.14	3500	1.49	52.64	5.40	0.21	34.83	82
AGD08025*24I	B	24	12.0~26.4	0.24	4000	1.72	60.62	7.18	0.28	38.92	82
AGD08025*24L	B	24	12.0~26.4	0.26	4500	1.93	68.3	8.94	0.35	41.77	82
AGD08025*24M	B	24	12.0~26.4	0.35	5000	2.18	77.09	11.41	0.45	44.11	82
AGD08025*24H	B	24	12.0~26.4	0.44	5500	2.38	83.99	13.32	0.52	46.89	82
AGD08025*48J	B	48	24.0~52.8	0.10	3500	1.49	52.64	5.40	0.21	34.83	82
AGD08025*48I	B	48	24.0~52.8	0.14	4000	1.72	60.62	7.18	0.28	38.92	82
AGD08025*48L	B	48	24.0~52.8	0.18	4500	1.93	68.3	8.94	0.35	41.77	82
AGD08025*48M	B	48	24.0~52.8	0.46	5000	2.18	77.09	11.41	0.45	44.11	82
AGD08025*48H	B	48	24.0~52.8	0.48	5500	2.38	83.99	13.32	0.52	46.89	82

● Drawing & panel out-cuts/ 圖面及出入風口

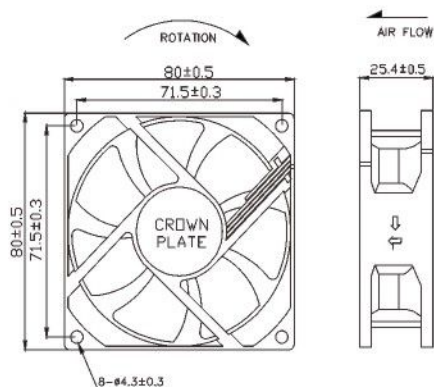

● Characteristic Curves/ 特性曲線

