

120 AGT series

120X120X25mm

●General Specification / 一般規格


- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)
Impeller : plastic(94V-0)
- Bearing / Ball bearing
- Weight / 230g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)
葉：塑膠(94V-0)
- 軸承 / 滾珠軸承
- 重量 / 230克



●Specification / 詳細規格 * 軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油軸承/sleeve bearing

Model	Bearing	Voltage	Operating Vol.	Current	Speed	Max. Air Flow		Max. Static Pressure		Sound	Weight
機型	軸承	電壓	操作電壓	電流	轉速	最大風量		最大風壓		噪音	重量
P/N	B/S/F	V	V	A	RPM	m³/min	CFM	mm-H ₂ O	In-H ₂ O	dBA	g
AGT12025*12L	B	12	6.0~13.2	0.12	2200	2.41	85.17	3.89	0.15	36.12	230
AGT12025*12M	B	12	6.0~13.2	0.34	2600	3.19	112.49	6.38	0.25	40.95	230
AGT12025*12H	B	12	6.0~13.2	0.41	3000	3.69	130.39	8.34	0.33	44.97	230
AGT12025*24L	B	24	12.0~26.4	0.19	2200	2.41	85.17	3.89	0.15	36.12	230
AGT12025*24M	B	24	12.0~26.4	0.21	2600	3.19	112.49	6.38	0.25	40.95	230
AGT12025*24H	B	24	12.0~26.4	0.33	3000	3.69	130.39	8.34	0.33	44.97	230
AGT12025*24U	B	24	12.0~26.4	0.36	3400	4.21	148.78	10.75	0.42	48.57	230

● Drawing & panel out-cuts/ 圖面及出入風口

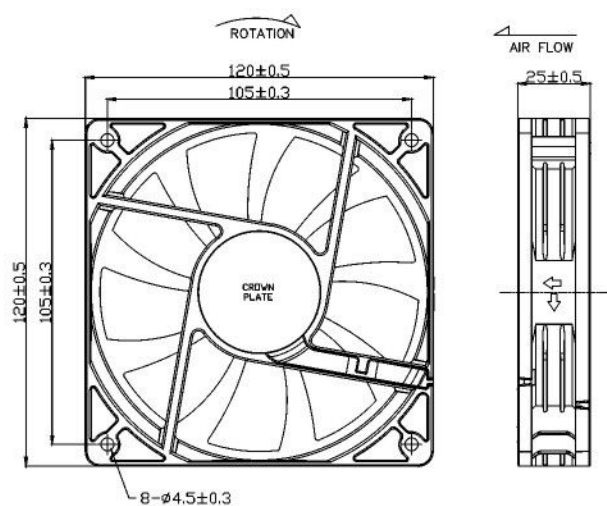

● Characteristic Curves/ 特性曲線

